


Installation and Users Instructions

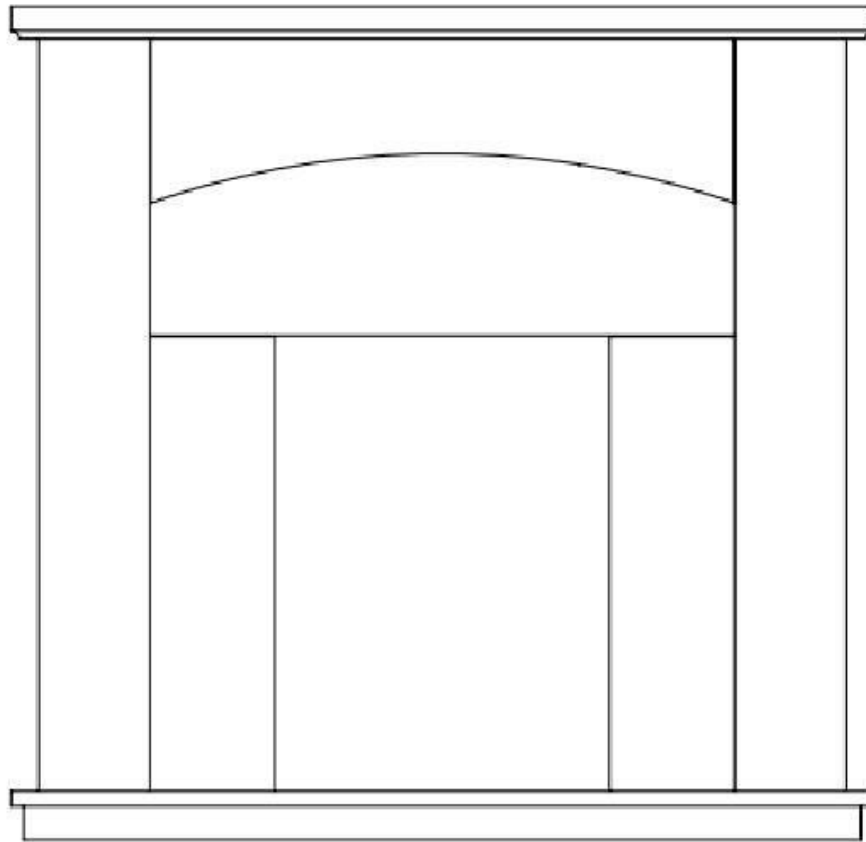

Model: TRAVERSE

**PLEASE READ THIS MANUAL BEFORE INSTALLING AND USING THE APPLIANCE.
INSTALLER: DO NOT DISCARD THIS MANUAL – LEAVE WITH THE CUSTOMER
SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

SECTION 1 - DIMENSIONS

Dimensions in mm




SECTION 2 - ASSEMBLY AND INSTALLATION

2.1 Unpack

Open the package carefully and remove all pieces. Carefully inspect each part for any damage before you begin assembly. If there are any problems please ring, and we shall be happy to help.

Please make sure that you have all the parts listed below before assembling.

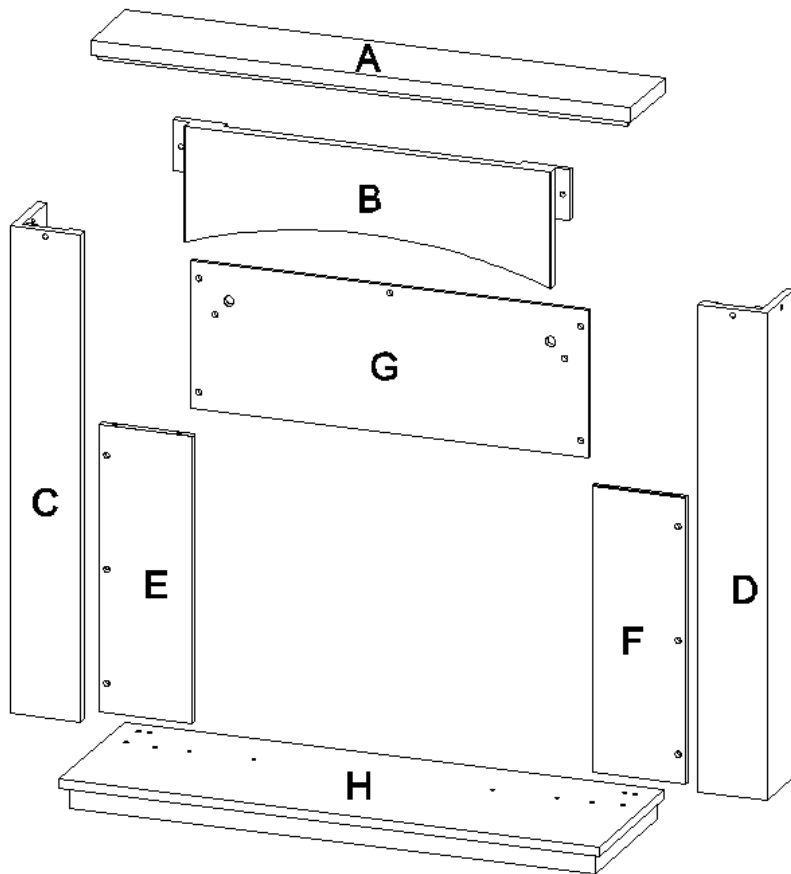


No.	Name	Quantity
A	Top panel	1
B	Front top panel	1
C	Left side panel	1
D	Right side panel	1
E	Second left panel	1
F	Second right panel	1
G	Second top panel	1
H	Base panel	1

NOTE: left and right of product are distinguished by its front view.

2.2 Before installation

Tools required: magnetic Philips screwdriver



2.3 Installation

NOTE!

Assembly required by two adults.

This fireplace suite must be fitted to the wall. Wall mounting brackets are supplied.

Use manual screwdriver only.

Use the washers supplied when fixing the screws. Do not overtighten.

Only fit the fire from the **front** of the fireplace be **careful** as not to scratch the mantel.



Step1.Fix the side panels (C&D) onto base panel (H) using 2 screws and washers for each leg.



Step 2. Fix the second left and right panel (E&F). using 3 screws for each panel.



Step 3. Fix the second top panel (G).using 6 screws and washers supplied.



Step 4. Pass the socket and wire of mood lighting through the hole on the second top panel (G) before fixing front top panel (B); Check that the led strip is still pushed firmly down into position on the self- adhesive pads.

Step 5. Fix the front top panel (B) using 6 screws and washers supplied; Fix the second top panel (G) with front top panel (B) using 4 screws and washers supplied.

Step 6. Fix the top panel (A) from underneath using 5 screws and washers supplied.



Step 7. Install the fire from front of the mantel. Note the fire must be fixed in position. Two screws should be positioned as detailed in the fire instructions to locate the fire on its key hole slots on the rear of the front frame.

NOTE: This fireplace must be fixed to the wall. Mirror plates are supplied but any other suitable concealed fixing may be used.

SECTION 3 - CLEANING & MAINTAINENCE

- 1 Your fireplace mantel surface coating will give off a slight smell for a short period of time. Try to ventilate as much as possible during this time.
- 2 Daily cleaning: Clean the mantel surfaces with a soft, lint-free cloth. Do not use cleaning or polishing products and try to avoid heavy or sharp articles which may damage the surface.
- 3 Avoid long-term direct sunlight, and excessive temperatures and humidity to protect the life of your furniture surface.