

Villager Boiler 12



Code	VB12-DUO
Output to water	12.1kW
Log length	330mm
Nett efficiency	71.5%
Width	563mm
Height	590mm
Depth	431mm

Our traditionally styled, twin-door Villager Boiler stove has all the rustic charm and character that is perfect for a country home. Whilst timeless and classic in its design, the Villager Boiler also features our innovative boiler stove technology, offering energy efficiency and superb heating performance.

Features

- 7 year guarantee
- Easily accessible water sensor for trouble-free maintenance
- Preheated airwash system for clean glass
- Burns wood or solid fuel
- Stainless steel ash pan
- Compact space-saving design
- Discreetly positioned thermostatic control fitted as standard
- 'Easy Boost' system
- Large, externally controlled riddling grate
- Flue Exhaust Diversion system to improve performance
- Primary and secondary burn to improve efficiency
- Suitable for installation in an indirect/open-vented central heating system
- Up to 3 Bar operating pressure
- Top or rear flue outlet

Optional Extras

- Arada Ash Carrier - Medium - [ARA017]
- Arada Universal Stand - [STAND002]
- Floor Fixing Kit - [AFS1135]
- Universal Stand/Log Store - [STAND004]

Villager Boiler 12 - Technical Information


Code	VB12-DUO
Output range to room	2-6kW
Output range to water	4-14kW
Nett efficiency	71.5 %
Width	563mm
Height	590mm
Depth	431mm
Height to centre of rear flue	439mm
Depth of back to centre of top flue	128mm
Flue diameter	127mm
Suitable for 12mm hearth	No
Under hearth temperature	135.6°C
Suitable for direct air supply kit	No
Packed weight	109kg
Maximum log length	330mm

Minimum Distance To Combustibles

To rear of stove	150 mm
To sides of stove	130 mm
Above stove	381 mm

Boiler Tapping Measurements

Distance A	325 mm
Distance B	312 mm
Distance C	250 mm
Distance D	442 mm

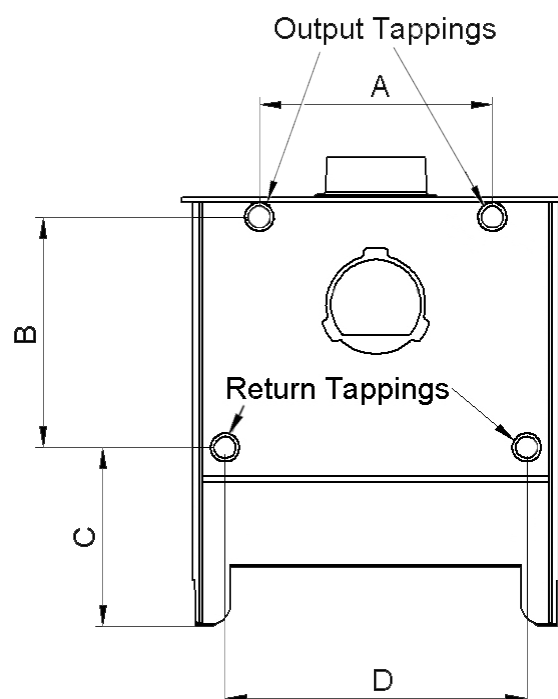

Freestanding Boiler Tapping Measurements.
Rear view example shown. Not to scale.