

Villager Boiler 20



Code	VB20-DUO
Output to water	18kW
Log length	405mm
Nett efficiency	70.5%
Width	634mm
Height	680mm
Depth	431mm

Our traditionally styled, twin-door Villager Boiler stove has all the rustic charm and character that is perfect for a country home. Whilst timeless and classic in its design, the Villager Boiler also features our innovative boiler stove technology, offering energy efficiency and superb heating performance.

Features

- 7 year guarantee
- Easily accessible water sensor for trouble-free maintenance
- Preheated airwash system for clean glass
- Burns wood or solid fuel
- Stainless steel ash pan
- Compact space-saving design
- Discreetly positioned thermostatic control fitted as standard
- 'Easy Boost' system
- Large, externally controlled riddling grate
- Flue Exhaust Diversion system to improve performance
- Primary and secondary burn to improve efficiency
- Suitable for installation in an indirect/open-vented central heating system
- Up to 3 Bar operating pressure
- Top or rear flue outlet

Optional Extras

- Arada Ash Carrier - Medium - [ARA017]
- Arada Universal Stand - [STAND002]
- Floor Fixing Kit - [AFS1135]
- Universal Stand/Log Store - [STAND004]

Villager Boiler 20 - Technical Information


Code	VB20-DUO
Output range to room	2-6kW
Output range to water	4-22kW
Nett efficiency	70.5 %
Width	634mm
Height	680mm
Depth	431mm
Height to centre of rear flue	521mm
Depth of back to centre of top flue	154mm
Flue diameter	152mm
Suitable for 12mm hearth	No
Under hearth temperature	144.0°C
Suitable for direct air supply kit	No
Packed weight	151kg
Maximum log length	405mm

Minimum Distance To Combustibles

To rear of stove	200 mm
To sides of stove	150 mm
Above stove	457 mm

Boiler Tapping Measurements

Distance A	340 mm
Distance B	374 mm
Distance C	278 mm
Distance D	463 mm

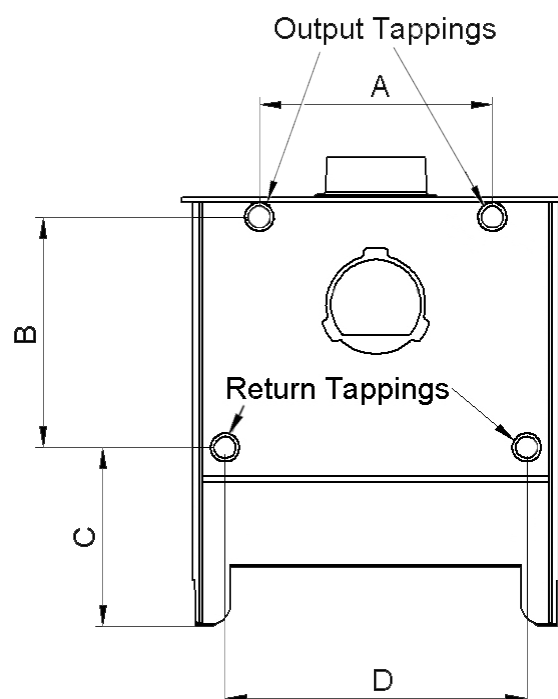

Freestanding Boiler Tapping Measurements.
Rear view example shown. Not to scale.