



Code	ECB5FPLUS-G2B
Output	4.9kW
Log length	300mm
Nett efficiency	80.3%
Width	431mm
Height	550mm
Depth	365mm

Features

Lifetime guarantee Preheated airwash system for clean glass Stainless steel ash pan and throat plate Burns wood or solid fuel Externally controlled riddling grate Large fire viewing window Patented Flexifuel System Primary and secondary burn to improve efficiency Top or rear flue outlet Height adjusting legs as standard

Optional Extras

5-6 Flue Increasing Adapter - [ADP56] Add-in Boiler - [AIB8] Arada Ash Carrier - Medium - [ARA017] Spigot 5 Inch Complete With Damper Flap And Handle -[AFS151A]



Arada Ltd, The Fireworks, Weycroft Avenue, Axminster, Devon. EX13 5HU. | Tel: +44 (0)1297 35700 (Mon-Fri 8:30am-5pm) Web: http://www.aradastoves.com | Email: info@aradastoves.com Printed 6th June 2017. Technical information updated 27th April 2017.

Ecoburn Plus 5 - Technical Information


Code	ECB5FPLUS-G2B
Output range	1-4.9kW
Nett efficiency	80.3 %
Width	431mm
Height	550mm
Depth	365mm
Height to centre of rear flue	431mm
Added height when on stand	136mm
Added height when on log store	386mm
Depth of back to centre of top flue	102mm
Flue diameter	127mm
Suitable for 12mm hearth	Yes
Under hearth temperature	61.2°C
Suitable for direct air supply kit	No
Packed weight	68kg
Maximum log length	300mm

Minimum Distance To Combustibles

To rear of stove	375 mm
To sides of stove	300 mm
Above stove	381 mm

Boiler Tapping Measurements

Distance A	255 mm
Distance B	264 mm
Distance C	347 mm

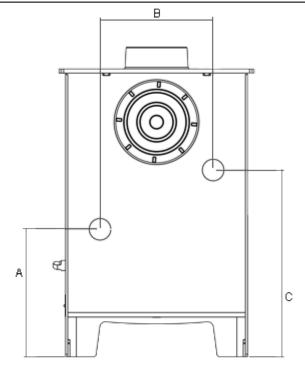

Add In Boiler Tapping Measurements. Rear view example shown. Not to scale.



Arada Ltd, The Fireworks, Weycroft Avenue, Axminster, Devon. EX13 5HU. | Tel: +44 (0)1297 35700 (Mon-Fri 8:30am-5pm) Web: http://www.aradastoves.com | Email: info@aradastoves.com Printed 6th June 2017. Technical information updated 27th April 2017.